

TEGUFLEX® P GREEN

PROCESSING EQUIPMENT

Strong and/or concentrated acids, compressed air that bears oil aerosols, etc...

Advantages

- Compensate thermal elongation,
- Isolate vibrations,
- Absorb pressure surges,
- Correct misalignments,
- Ensure a tight sealing.

Technical description

Inner tube: CSM, black, fluted.

Reinforcement: Synthetic textile.

Cover: CR, black, smooth, oil and weather resistant.

Temperature range: -25°C to 90°C.

Standard/Approval:

ABS, GL, PED (97/23/EC)

Couplings/Fittings

Turnable flanges in zinc plated steel.


Other material: stainless steel 316, hot-dip galvanized, EPOXY painting, etc...

Dimensions: EN 1092 PN6/10/16- ASME B16.5 150lbs

Other types on request.

Complementary information

Option devices: inner liner PTFE, vacuum ring (316Ti), flameguards, PTFE safety shields on request.

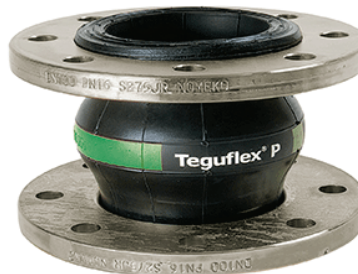

ID mm	PN	Working pressure bar	Bursting pressure bar	BL m	Q cm²	E mm	F mm	Compression mm	Elongation mm	Lateral mm	Angular °	Vacuum BAR	With support ring BAR	Weight kg	Compression kg/cm	Elongation kg/cm	Lateral kg/cm	Article number	Stock (●) or min. order piece
25.0	10/16	16	50	130	35	77	72	30	20	20	35	0.8	1.0	3	50	75	50	5007757	□
32.0	10/16	16	50	130	35	77	72	30	20	20	35	0.8	1.0	3	50	75	50	0507275	●
40.0	10/16	16	50	130	50	85	80	30	20	20	35	0.8	1.0	3	50	75	50	0507276	●
50.0	10/16	16	50	130	74	95	90	30	20	20	35	0.7	1.0	4	50	75	50	0507277	●
65.0	10/16	16	50	130	87	110	105	30	20	20	30	0.6	1.0	5	50	75	50	0507278	●
80.0	10/16	16	50	130	120	125	120	30	20	20	30	0.5	1.0	5	50	75	50	0507279	●
100.0	10/16	16	50	130	143	145	140	30	20	20	25	0.5	1.0	6	65	85	65	0507331	●
125.0	10/16	16	50	130	210	170	165	30	20	20	25	0.4	1.0	8	65	85	65	0507280	●
150.0	10/16	16	50	130	283	195	190	30	20	20	15	0.3	1.0	11	75	100	75	0507281	●
200.0	10	16	50	130	525	245	240	30	20	20	15	0.3	1.0	17	75	100	75	0507238	□
	16			130	525	245	240	30	20	20	15	0.3	1.0	17	75	100	75	0507913	□
250.0	10	16	50	130	636	295	290	30	20	20	10	0.2	1.0	22	100	150	100	0507239	□
	16			130	636	295	290	30	20	20	10	0.2	1.0	22	100	150	100	0507914	□
300.0	10	16	50	130	897	345	340	30	20	20	10	0.2	1.0	30	100	150	100	0507240	□
	16			130	897	345	340	30	20	20	10	0.1	1.0	30	100	150	100	0508415	□

□ Upon availability.

Branding



TRELLEBORG IZARRA

IZARRA-ALAVA-SPAIN

Batch number

Working pressure

Testing pressure

T MAX/MIN

DN

Month/Year

Digital version

